

TYPO3 Core - Bug #23375

IRRE: fails to save preexisting child record selected by combo

2010-08-15 00:12 - Florian Sauer

Status:	New	Start date:	2010-08-15
Priority:	Should have	Due date:	
Assignee:		% Done:	0%
Category:	FormEngine aka TCEforms	Estimated time:	0.00 hour
Target version:		Complexity:	nightmare
TYPO3 Version:	4.4	Is Regression:	No
PHP Version:	5.3	Sprint Focus:	
Tags:			

Description

Installed Ext IRRE Tutorial Sample files on a clean 4.4.2 Installation to reproduce the error.

- Choose the example "m:n asymmetric combo"
- add a child record mn asym Offers
- select a Hotel (e.g. Rosengarten Hotels Luxury Ressornt"
- the newly created offer appears in the combo
- click on the entry in the combo
- fields of this child record are displayed and filled with the correct information of the child record ("offer")
- save and close the hotel record
- open the hotel record from the list again
- child record information has not been saved

The same procedure as described above succeeded on a Typo3 V 4.3.3 installation.

I also applied the IRRE patches I found here (irre_7611_rev8536.. and _v2.patch) but this did not solve the problem (issue imported from #M15459)

Related issues:

Related to TYPO3 Core - Feature #18968: Add existing records to IRRE field **New** **2008-06-17**

History

#1 - 2011-05-18 18:12 - Thomas Mammitzsch

- Target version deleted (0)

confirm!

#2 - 2012-10-31 04:42 - Lars Houmark

I can confirm this bug still exists in TYPO3 4.7.5 and it is completely breaking m:n relations and the possibility to relate the same child record to several parents, and by that pretty much makes IRRE useless IRL.

It seems this has been broken for several major TYPO3 versions. Replicating is easy though, simply install irre_tutorial extension, and follow the guide from Florian and the child record ends up empty after saving.

I'll be looking more into debugging, but IRRE is fairly complicated just to understand from a configuration perspective.

#3 - 2014-01-20 17:23 - Ingo Schmitt

- Category set to 978

- Is Regression set to No

#4 - 2015-01-24 12:07 - Mathias Schreiber

- Target version set to 7.4 (Backend)

- Complexity set to nightmare

#5 - 2015-08-05 10:29 - Susanne Moog

- Target version changed from 7.4 (Backend) to 7.5

#6 - 2015-09-24 19:31 - Benni Mack

- Target version deleted (7.5)

#7 - 2018-03-17 22:04 - Riccardo De Contardi

- File step1.png added

- File step2.png added

- File step3.png added

- File step4.png added

- File step5.png added

- File step6.png added

I think it is still reproducible with the latest 9.2.0-dev (latest master) with the following procedure:

Preparation

1) as the extension EXT:irre_tutorial on TER does not work anymore on TYPO3, you have to copy the fixture from typo3/sysex/core/Tests/Functional/Fixtures/Extensions/irre_tutorial to your /typo3conf/ext

2) enable the extension

3) use the fake data from https://github.com/TYPO3-svn-archive/irre_tutorial/blob/master/res/T3D_IRRE.t3d: once you have imported it, you will have a sysfolder IRRE Sample Tutorial Data with some subpages

Text execution

1) Click on the page "m:n asymmetric combo" and open the hotel record "Rosengarten Hotels Appartment"

The screenshot shows the TYPO3 backend interface. On the left, a file explorer shows the 'IRRE Tutorial Sample Data' folder with subfolders like '1:n comma separated values', '1:n foreign_field', 'm:n asymmetric', 'm:n symmetric', 'm:n attributes', 'm:n asymmetric selector', 'm:n asymmetric combo', 'm:n (MM) asymmetric', and '1:n foreign_field on pages'. The 'm:n asymmetric combo' folder is selected. On the right, the page 'm:n asymmetric combo' is displayed. Below the page title, there is a dropdown menu 'Make new translation of this page'. Below that, a table of records is shown. The table has a header 'm:n ASym: Hotels (2) >' and a column 'Title'. The first record is 'Rosengarten Hotels Appartment', which is circled in red. The second record is 'Rosengarten Hotels Luxury Resort'. Each record has a set of action icons: a pencil (edit), a power button (toggle), a trash can (delete), an information icon (info), a refresh icon (refresh), a plus sign (add), and a dropdown arrow.

2) Offers > Create New > OFFER TEST 1 and save

General Visibility

Title: [title]

Rosengarten Hotels Appartment ×

Offers: [offers]

+ Create new

Create new relation

Wellness & Beauty Week

3) Create a price "PRICE 1 OFFER TEST 1", save and close

General Visibility

Title: [title]

Rosengarten Hotels Appartment ×

Offers: [offers]

+ Create new

Create new relation

Wellness & Beauty Week

OFFER TEST 1

General Visibility

Prices: [prices]

+ Create new

[No title]

General Visibility


Title: [title]

PRICE 1 OFFER TEST 1 ×

Price (EUR): [price]

11 ×

4) open the second hotel "Rosengarten Hotels Luxury Resort"

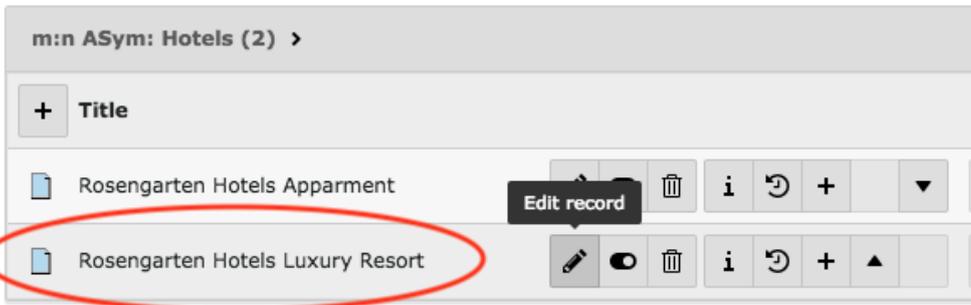

5) create new relation > to OFFER TEST 1 >when you click on "save" you end up with a "No title" relation

General Visibility

Title: [title]

Rosengarten Hotels Luxury Resort

Offers: [offers]

+ Create new

Create new relation

[No title]

General Visibility

Prices: [prices]

+ Create new

6) if you open this record "m:n ASym: Hotels<->Offers" from list view, you'll see that it has offerid: [INVALID VALUE ("0")] [0]

Edit m:n ASym: Hotels<->Offers "24" on

General Visibility

Hotel: [hotelid]

Rosengarten Hotels Luxury Resort [12]

Offer: [offerid]

[INVALID VALUE ("0")] [0]

Prices: [prices]

+ Create new

#8 - 2018-03-19 11:11 - Riccardo De Contardi

- Related to Feature #18968: Add existing records to IRRE field added

Files

step1.png	66.9 KB	2018-03-17	Riccardo De Contardi
step2.png	28.3 KB	2018-03-17	Riccardo De Contardi
step3.png	47.3 KB	2018-03-17	Riccardo De Contardi
step4.png	26.8 KB	2018-03-17	Riccardo De Contardi
step5.png	30.6 KB	2018-03-17	Riccardo De Contardi
step6.png	30.4 KB	2018-03-17	Riccardo De Contardi